

Float Controls

hermetically sealed mercury switch




Custom designed float switch for liquid level control. Designed for use with liquid level warning alarms, pilot duty control of simplex or duplex systems, sump pumps or any type of high/low operation. Available with standard power cords or custom cords with quick-connect plugs, these floats can serve as original equipment components, retrofit, or as replacement parts.



UL and CSA Recognized
U.L. # E87187 C.S.A. # LR64966

Ordering Codes

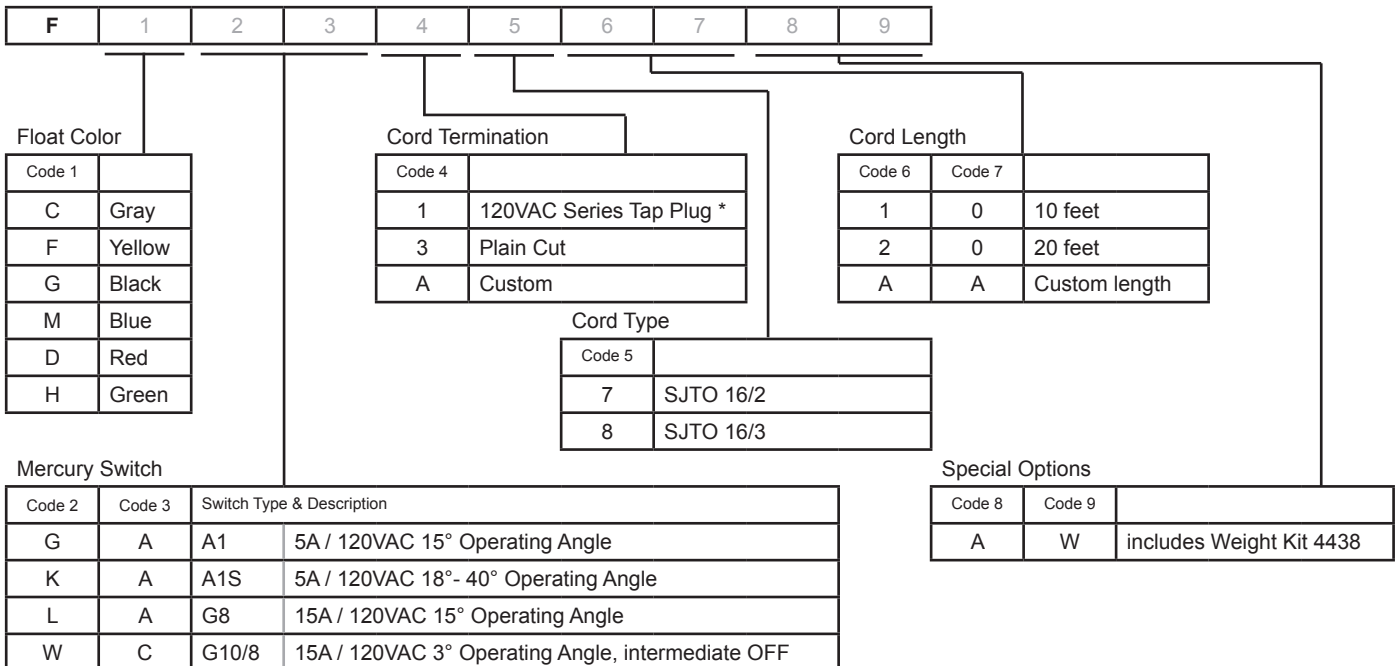

Note: * = UL Listed

Example: FCGA3710AW

Gray Float, A1 Style mercury switch, plain cut cord termination, SJTO 16/2 cord type, cord length 10 feet with weight kit.

Contact factory for custom requirements or specific application information




Float Controls

hermetically sealed mercury switch



Typical Application

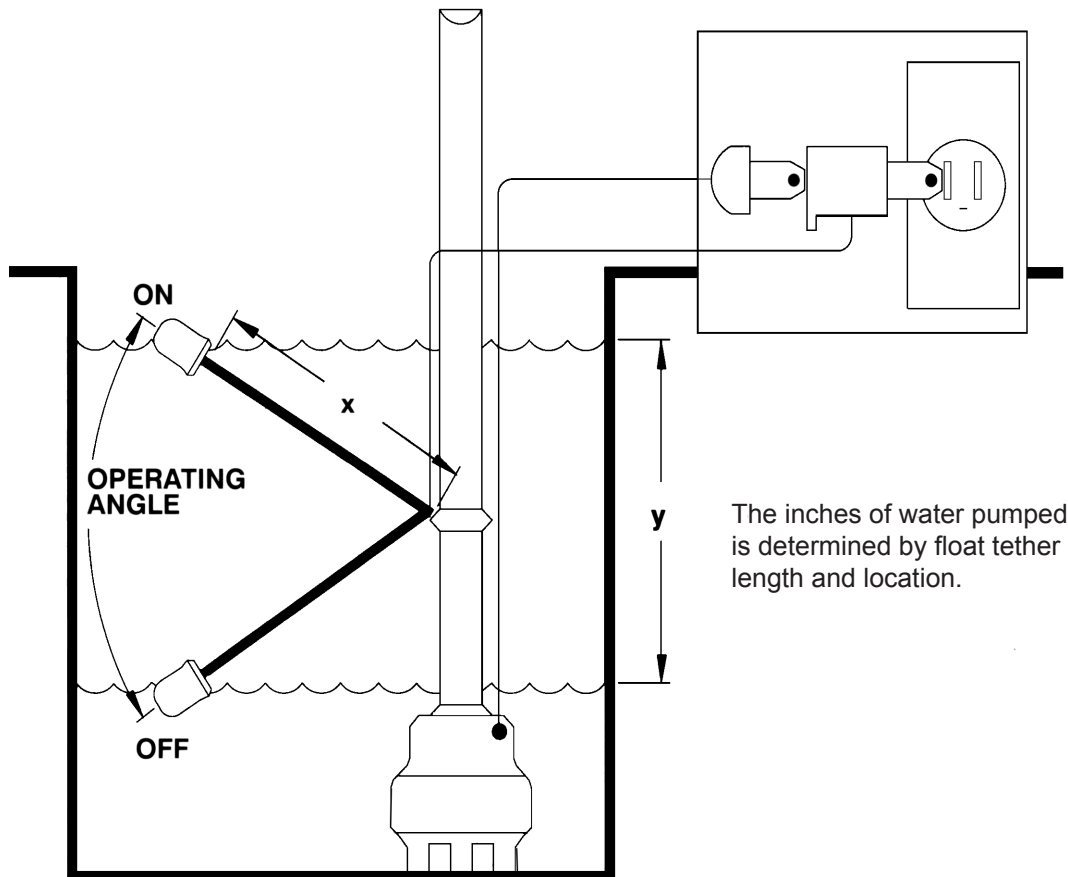

Float switches are for use with motor-operated water pumps only, not for swimming pool use.

Recommended operating temperature range is 32°F to 160°F (0°C to 71°C)

Specifications are subject to change without notice. E&OE.

American Electronic Components Inc., 1101 Lafayette Street, Elkhart, Indiana IN46516

Page 2 of 2
Ref: FSHG 012612JHM

www.aecensors.com

Sales Department Tel: (888) 847-6552

