



TMR2003

TMR Linear Sensor

General Description

The TMR2003 linear sensor utilizes a unique push-pull Wheatstone bridge composed of four TMR sensor elements. The TMR2003 is available in a 3 mm X 3 mm X 1.45 mm SOT23-5 package.

Features and Benefits

- Tunneling Magneto resistance (TMR) Technology
- High Sensitivity
- Low Power Consumption
- Excellent Thermal Stability
- Compatible with Wide Range of Supply Voltages
- No need for set/reset calibration

Applications



- Weak Magnetic Field Sensing
- Current Sensors
- Position and Displacement Sensing



TMR2003

Transfer Curve

The following figure shows the response of the TMR2003 to an applied magnetic field in the range of ± 5 Oe and ± 200 Oe when the TMR2001 is biased at 1V.

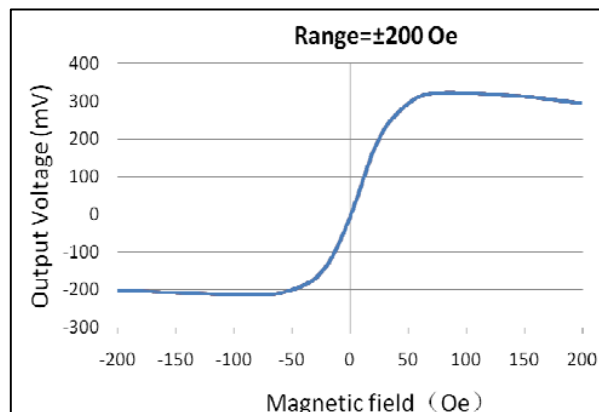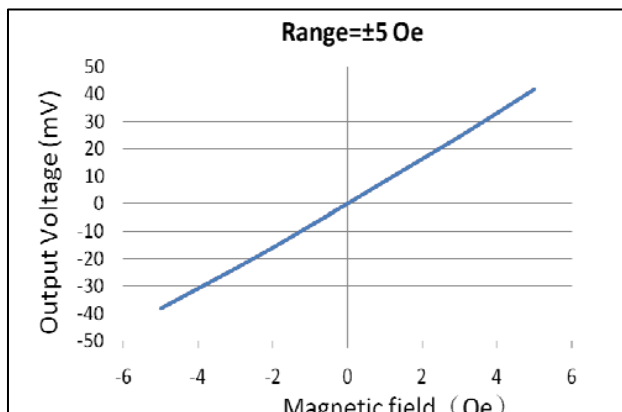

Pin Configuration

(Arrow indicates direction of applied field that generates a positive output voltage.)

Pin No.	Pin Name	Pin Function
V _{CC}	1	Supply Voltage
NA	2	Not connected
V+	3	Analog Differential Output 1
Gnd	4	Ground
V-	5	Analog Differential Output 2

Top View

Absolute Maximum Ratings

Parameter	Symbol	Limit	Unit
Supply Voltage	V _{CC}	7	V
Reverse Supply Voltage	V _{RCC}	7	V
Max Exposed Field	H _E	4000	Oe ⁽¹⁾
ESD Voltage	V _{ESD}	4000	V
Operating Temperature	T _A	-40~125	°C
Storage Temperature	T _{stg}	-50 ~150	°C

Specification (V_{CC}=1.0V, T_A=25°C, Differential Output)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Supply Voltage	V _{CC}	Operating		1	7	V
Supply Current	I _{CC}	Output Open		18 ⁽²⁾		μA
Resistance	R			56		kOhm
Sensitivity	SEN	Fit @±5Oe		6		mV/V/Oe
Saturation Field	H _{sat}		-35		55	Oe
Non-Linearity	NONL	Fit @±5Oe		1		%FS
Offset Voltage	V _{offset}		-30		30	mV/V
Hysteresis	Hys	Fit @±5Oe		0.4		Oe
Temperature Coefficient of Resistance	TCR	H = 0 Oe		-620		PPM/°C
Temperature Coefficient of Sensitivity	TCS			-1100		PPM/°C


Notes:

(1) 1 Oe (Oersted) = 1 Gauss in air = 0.1 millitesla = 79.8 A/m.


(2) Custom sensor resistance may be available upon request.

Package Information

SOT23-5L package

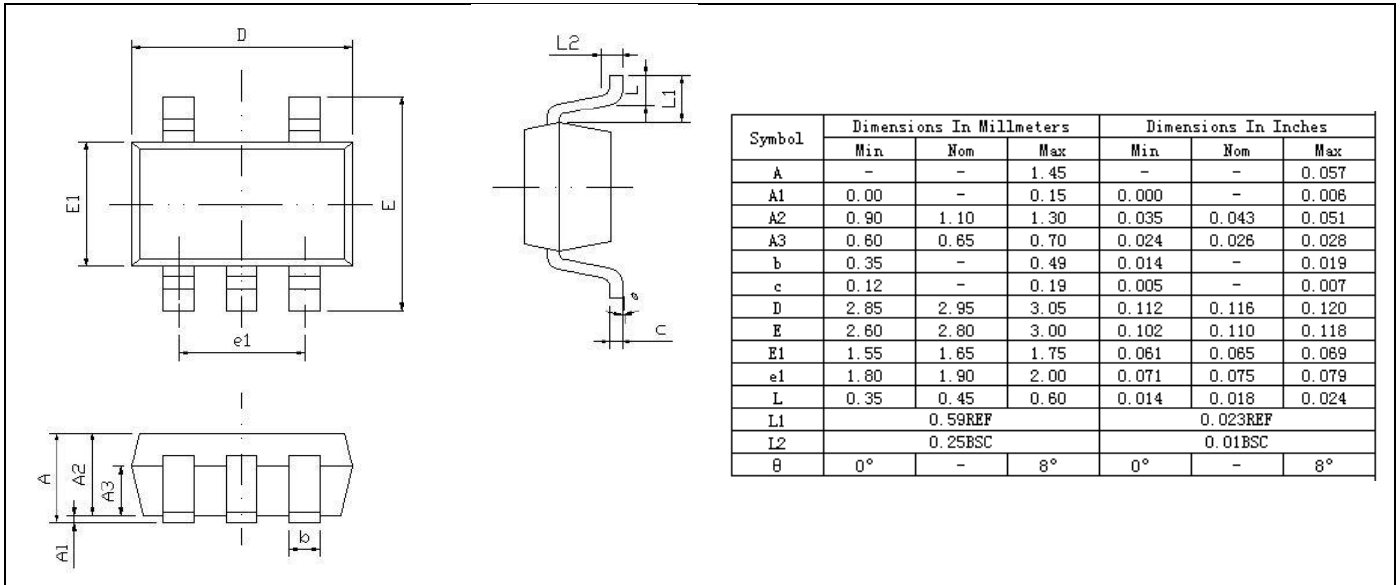

TMR Sensor Position

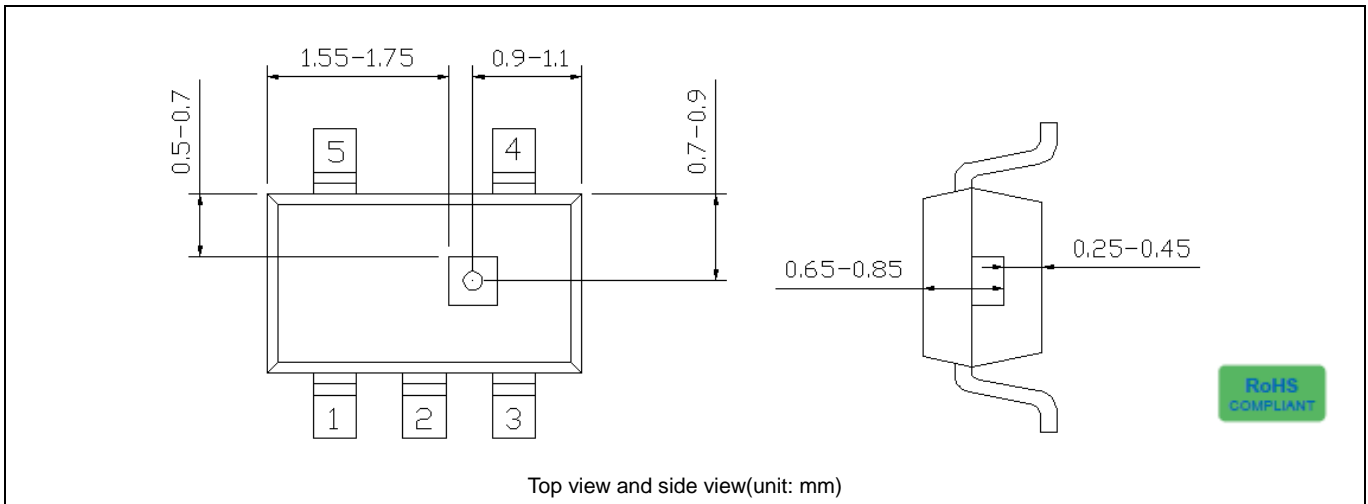



American Electronic Components Inc.

1101 Lafayette Street, Elkhart, Indiana 46516, United States of America.

Web: www.aecensors.com Email: sales@aecensors.com

Toll: 888 847 6552, Tel: +1 574 293 8013

The information provided herein by MultiDimension Technology Co., Ltd. (hereinafter MultiDimension) is believed to be accurate and reliable. Publication neither conveys nor implies any license under patent or other industrial or intellectual property rights. MultiDimension reserves the right to make changes to product specifications for the purpose of improving product quality, reliability, and functionality. MultiDimension does not assume any liability arising out of the application and use of its products. MultiDimension's customers using or selling this product for use in appliances, devices, or systems where malfunction can reasonably be expected to result in personal injury do so at their own risk and agree to fully indemnify MultiDimension for any damages resulting from such applications.